

Innovation in Gas Analysis

JCT-1 Compact and JCT-2 Midi Sample Gas Compressor-Coolers



APPLICATION

- For extractive gas analysis
- For emission and process monitoring
- Continuous drying of sample gas to a precise low and constant outlet dew point
- Minimises water vapour cross sensitivities and volumetric errors

BENEFITS

- Extremely precise long term stable dew point even under varying loads
- High flow rates and water vapour dew points possible
- Easy to change heat exchangers
- Continuous condensate removal
- Low maintenance operation
- Easy to maintain design

FEATURES

- Proven and reliable technology
- Performance optimised construction
- High performance heat exchanger
- Heat exchanger material PVDF, Duran glass or stainless steel
- One or two independent gas paths
- Proportional temperature controller
- Digital temperature indication
- Integrated condensate pump
- Status contact
- Compact design



JCT

Analysentechnik
GmbH

Gas Sampling Probes

Heated Sample Lines

Sample Gas Coolers

Condensate
Treatment

Accessories

Gas Conditioning
Systems

Sample Gas
Converters

MADE IN AUSTRIA



www.jct.at


TECHNICAL DATA

Model	JCT-1 Compact			JCT-2 Midi				
Description	sample gas compressor coolers							
Cooling principle	compressor cooling							
Number of heat exchangers / gas paths	1 / 1 (Mono)			1 / 1 (Mono)			1 / 2 (Dual)	
Material heat exchangers	PVDF	Duran glass	SS316	PVDF	Duran glass	SS316	PVDF	SS316
Operation								
Max. gas flow rate* [NI/hr]	125	150	250	180	200	350	2 x 90	2 x 160
Max. Gas inlet temperature* [°C]	140	160	180	140	160	180	140	180
Max. Gas inlet dew point* [°C]	70	65	80	70	65	80	70	80
Gas outlet dew point	3°C							
Dew point stability (for constant inlet conditions)	±0,3K							
Ambient temperature	+5...+45 °C							
Cooling capacity	160 W			215 W				
Temperature alarm limits	<0 / >+10°C							
Operating pressure with condensate pump	0,2...2,2 bara							
Max. operating pressure without condensate pump [bara]	2,5	2,0	160	2,5	2	160	2,5	160
Ready for operation	< 20 min.							
Pressure drop at 100 NI/hr	approx. 6 mbar							
Construction								
Dimensions over all (W x H x D)	185 x 300 x 355 mm			230 x 300 x 355 mm				
Installation	stand alone or wall mounting (rear or side)							
Mounting position	horizontal							
Weight	17 kg			18,5 kg			19 kg	
Housing, colour	Sheet steel 1,5 mm, powder coated, RAL 7035							
Dead volume per gas path	67 ml						2 x 50 ml	
Connection sample gas inlet	PVDF and 1.4401: 6 mm tube; glass: GL14 with hose connection							
Connection sample gas outlet and condensate outlet on top (standard)	PVDF: PVDF hose fitting DN 4/6; 1.4401: 6 mm tube; glass: GL14 with hose connection							
Connection condensate outlet at the bottom (on request)	PVDF and 1.4401: 12 mm tube; glass (only Mono available): GL18 with hose connection							
Protection class	IP 20 (EN 60529 / EN 61010)							
Approvals / signs	CE							
Electrics								
Power supply	220....240 VAC 50 Hz or 220....240 VAC 60 Hz or 100....115 VAC 50/60 Hz							
Power consumption (depending on load and ambient temperature)	190 W							
Connection power / status signal	2,3 m cable, open ends							
Fusing	external on installation site, fuse characteristic C: 230 VAC 6 A; 115 VAC 10 A							
On-time	100 %							
Temperature indication	digital							
Status contact	volt free changeover contact max. 230 VAC / 2 A min. 5 VADC / 5 mA							

* Results from the effective cooling capacity at 25°C ambient temperature and 3°C outlet dew point and can be influenced by further operational parameters


DIMENSIONS

JCT-1 Compact

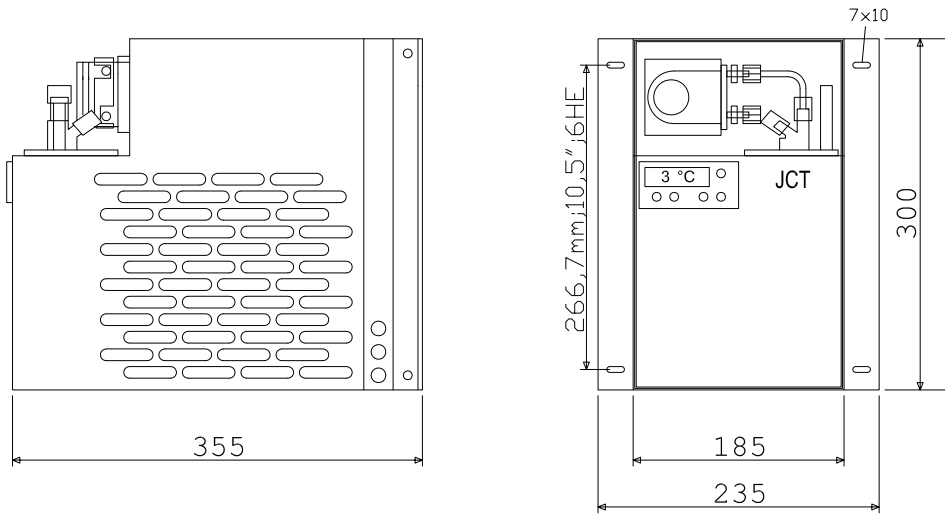

Dimensions in mm

JCT-2 Midi

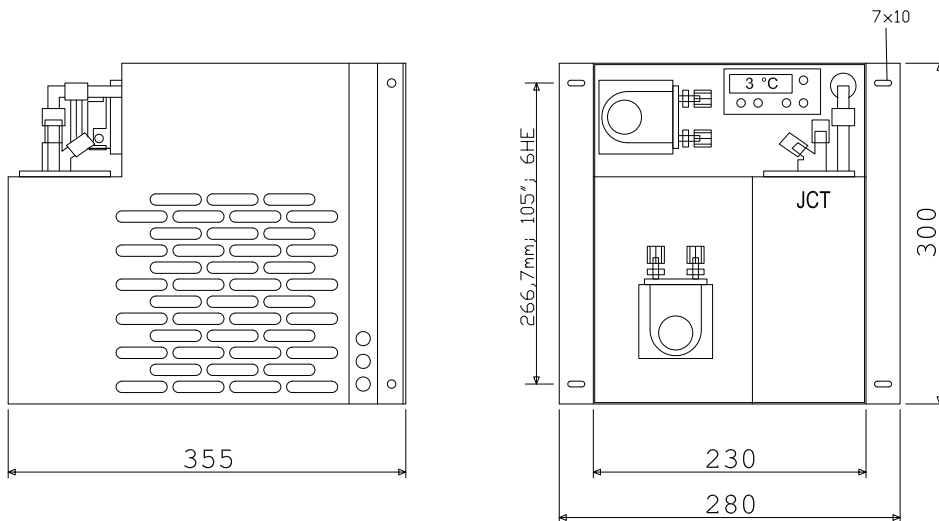

Dimensions in mm



ORDER CODES

JCT-1 Compact

Housing	For rear panel mounting	S				
	For side panel mounting	Q				
Gas heat exchanger	1 Mono PVDF gas heat exchanger			1		
	1 Mono SS316 gas heat exchanger			2		
	1 Mono Duran glass gas heat exchanger			3		
Condensate pump	Without condensate pump JSR-25			0		
	1 Condensate pump JSR-25			1		
Power supply	230 VAC 50 Hz				1	
	230 VAC 60 Hz				2	
	115 VAC 50/60 Hz				3	
Options	Standard version					X
	Special version (on request)					1

Order code

JCT-1.

JCT-2 Midi

Housing	For rear panel mounting	S				
	For side panel mounting	Q				
Gas heat exchanger	1 Mono PVDF gas heat exchanger			1		
	1 Mono SS316 gas heat exchanger			2		
	1 Mono Duran glass gas heat exchanger			3		
	1 Dual PVDF gas heat exchanger			4		
	1 Dual SS316 gas heat exchanger			5		
Condensate pump	Without condensate pump JSR-25			0		
	1 Condensate pump JSR-25			1		
	2 Condensate pumps JSR-25			2		
Power supply	230 VAC 50 Hz				1	
	230 VAC 60 Hz				2	
	115 VAC 50/60 Hz				3	
Options	Standard version					X
	Special version (on request)					1

Order code

JCT-2.

JCT Analysetechnik GmbH

Werner Heisenberg-Straße 4 A-2700 Wiener Neustadt
 Tel. +43 (0) 2622 / 87201 Fax +43 (0) 2622 / 872011
 E-Mail: sales@jct.at Web: www.jct.at

